


PERFORMANCE:

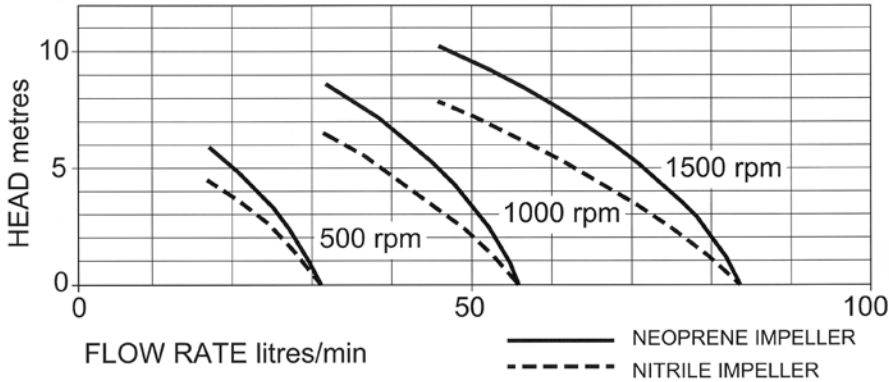


MODEL	Maximum flow rate		Maximum head	
	l/min	gall/min	metres	feet
JD3/4-200	82	18	20	65
JD3/4-237	82	18	18	59

Max Power absorbed 550 watt at 1500rpm

DIMENSIONS:

WEIGHT: 2.0Kg

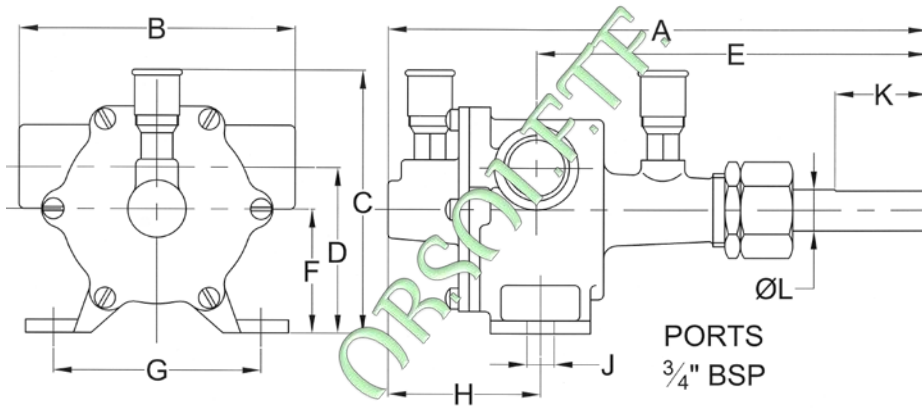

A	B	C	D	E	F	G	H	J	K	L
205	105	102	64	149	48	79	58	Ø10	35	Ø15.8

MATERIALS OF CONSTRUCTION:

Body	Bronze
Impeller	Neoprene or Nitrile
Wearplate	Not fitted
Shaft	Stainless steel
Shaft seal	Packed gland
Bearings	Plain
Port type	3/4" BSP to BS21 (DIN2999)

MODELS:

JD3/4-200 Standard Neoprene Impeller

JD3/4-237 Oil resistant Nitrile



BRONZE FLEXIBLE IMPELLER PEDESTAL PUMP

JD3/4 SERIES



PUMP with 3/4" BSP PORTS

- * Constructed from marine quality bronze and stainless steel
- * Self-prime from dry up to 2.4m
- * Easy to service and maintain
- * Will tolerate abrasive wear
- * Handles hard and soft solids without clogging
- * Can pump in either direction
- * Will not airlock